

SP5000-8000-SW

SP-SW Series

Strong DC/AC transformer design with higher efficiency, enjoy the stability and reliability all the time.



DC Start




DC/AC
Transformer Design



Detachable
LCD Display

Features

- Compatible with both linear and non-linear load
- Controllable & Removable panel with LCD
- DC start and automatic self-diagnostic function
- Designed to operate under harsh environment
- Heat dissipation design
- 3U 19" Rack-Mounted Design or Wall-Mounted Design
- Pre-settable Parameters
- 24hrs operation under inverter mode
- THD less than 3%
- DC/AC transformer design

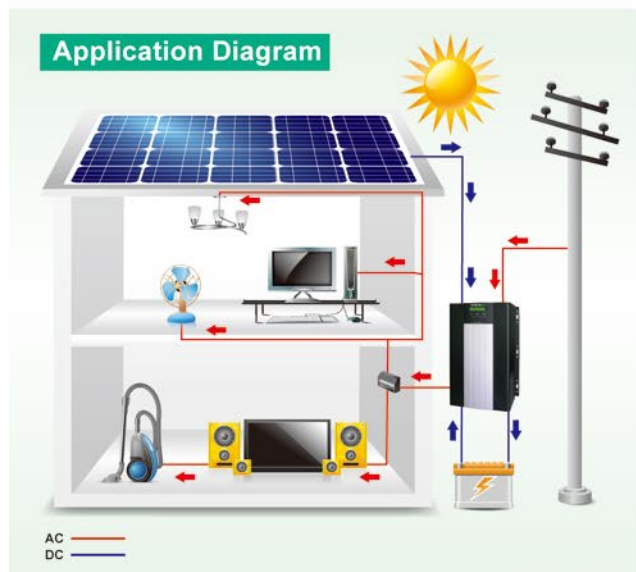

Specifications

MODEL	SP5000-SW	SP6000-SW	SP8000-SW
Capacity	5KVA/4000W	6KVA/6000W	8KVA/8000W
AC INPUT (FROM ARRAY)			
Nominal Voltage	120 Vac or 230 Vac		230 Vac
Voltage Range	Acceptable Voltage Range	60~135 Vac or 120~270 Vac	120~270 Vac
	Low Voltage Transfer	60 Vac ±2% ; 120 Vac ±3%	120 Vac ±2%
	Low Voltage Return	65 Vac ±2% ; 130 Vac ±3%	130 Vac ±2%
	High Voltage Transfer	135 Vac ±% ; 270 Vac ±3%	270 Vac ±2%
	High Voltage Return	130 Vac ±2% ; 260 Vac ±3%	260 Vac ±2%
Frequency	50Hz or 60Hz		
DC INPUT (FROM ARRAY)			
Nominal Voltage	24V		48V
Charger Voltage	27.6V		55.2V
Solar Maximum Peak Voltage	50V		100V
Start-up Voltage	24V		44V
Polarity Protect		Yes	
Backflow Protect		Yes	
Maximum Charge Current		40A	
OUTPUT			
Voltage	110/115/120Vac		220/230/240Vac
Voltage Regulation(Battery Mode)	<3% RMS for entire battery voltage range		
Frequency Regulation	Line Mode	Synchronized to AC Main	
	Battery Mode	50Hz or 60Hz ±0.1Hz	
Power Factor	0.8	1	
Wave Form	Pure Sine Wave		
Overload Protection	Line Mode	>110%, then buzzer alarms and amber LED blinks continuously	
	Battery Mode	110%~150% for 30 sec ; >150% for 200ms	
Short Circuit Protection	Line Mode	Circuit Breaker	
	Battery Mode	Electronic Circuit	
TRANSFER TIME			
Typical	< 8 ms.		
Battery Voltage	24Vdc	48Vdc	
Backup Time	Depends on system load and battery capacity (Base on the batteries connected)		
Selectable Charging Current	Yes		
DISPLAY			
LCD	UPS status, I/P&O/P Voltage Frequency, Load Level, Battery Voltage & Level, Temperature, Model		
LED	Normal (Green), Warning (Amber), Fault (Red)		
AUDIBLE ALARM			
Battery Mode	Beeping every 4 seconds		
Low Battery	Beeping every second		
UPS Fault	Beeping continuously		
Overload	Beeping twice per second		
ENVIRONMENT			
Operation Temperature	0-40°C ; 32-104°F		
Relative Humidity	0-95% non-condensing		
Audible Noise	Less than 55dBA (at 1M)		
PHYSICAL			
Weight (Net / Gross Weight)	49.2kgs / 63kgs	51.4kgs / 66.6kgs	53.6kgs / 67.7kgs
Dimensions (W×H×D)	415×600×260mm	415×600×260mm	415×600×260mm
ACCESSORY			
RS232 or SNMP	Optional		

Specifications are subject to change without notice.

OPTI-Solar Asia:
Tel: +886-2-2246-7272
Fax: +886-2-2246-7312

OPTI-Solar USA:
Tel: +1-909-869-5700
Fax: +1-909-869-5730

OPTI-Solar Middle East:
Tel: +9714-8819-838
Fax: +9714-8819-938

OPTI-Solar Europe B.V.:
Tel: +31-40-2628050